ITEM	P/N	Page
Common Mode Filter	ICMF112P301MFR	1

# Data Sheet

- ITEM : <u>COMMON MODE FILTER</u>
- PART NO : <u>ICMF112P301MFR</u>

购买原装正品请认准-德方电子 免费服务热线: 400-655-8700 深圳总部电话: 0755-28187877 网址: www.denovocn.com

ITEM	P/N	Page
Common Mode Filter	ICMF112P301MFR	2

## **1. GENERALS**

• This specification covers the engineering requirements for the ICMF112P301M (Common Mode Filter)

## 2. FEATURES

- Effective for suppressing common mode noise and almost no effect for high speed differential data line
- Ultra low profile  $(1.2 \times 1.0 \times 0.6 \text{mm})$
- Ceramic multilayer type SMD component
- Non-polarized product
- It is a product conforming to RoHS directive.

### **3. APPLICATIONS**

- LVDS lines in notebook computers
- USB2.0, IEEE1394, DVI in PDP, LCD TV, DVD Player, PC, Audio player, DSC

### 4. PRODUCT SPECIFICATIONS

#### 4. 1 PART NUMBER CODE

<u>ICMF</u>	<u>11</u>	<u>2P</u>	<u>301</u>	M
1	2	3	4	5

- ① Series name of ICT's Common Mode Filter
- ② Dimensions, 1.25mm (L) x 1.0mm (W)
- ③ The Number of lines, 2P = 2 lines
- ④ Common Mode Impedance (at 100MHz),  $301=300\Omega$
- (5)Tolerance of common mode impedance,  $M = \pm 25\%$


购买原装正品请认准-德方电子 免费服务热线: 400-655-8700 深圳总部电话: 0755-28187877 网址: www.denovocn.com




#### 4. 2 SPECIFICATION OF ELECTRICAL CHARACTERISTICS


Characteristics	Common Mode Impedance	Resistance	Insulation Resistance	Rated Current
symbol	Z <sub>CM</sub>	R <sub>DC</sub>	IR <sub>CR</sub>	I <sub>R</sub>
Units	Ω	Ω	MΩ	mA
Test Condition	@100MHz	25℃±2℃	10V	25℃±2℃
Value	300(±25%)	Max 4.0	Max 10	Max 100

#### - Impedance Curves

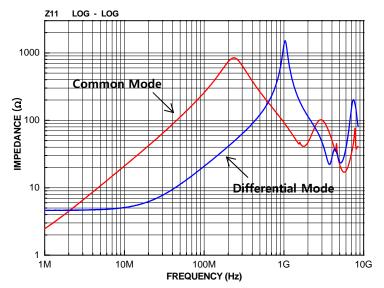

#### - Transmission characteristics (S-parameter)

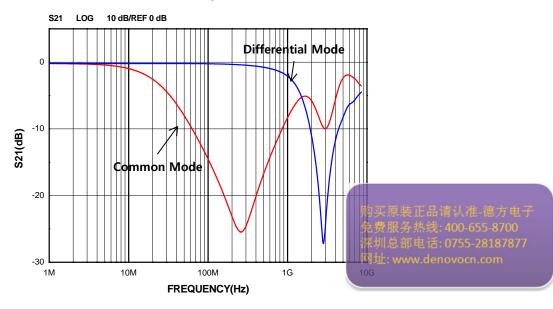




#### 4. 3 OPERATING TEMPERATURE

DESCRIPTION	REQUIREMENTS	
Operating Temperature	-40°C ~ + 85°C	

# 5. EQUIVALENT CIRCUIT



PIN NUMBER	DESCRIPTION
<u>(1</u> ~4)	data line

# 6. MECHANICAL PROPERTY

6. 1 Appearance and Dimension

