


**PRODUCT
DATASHEET**

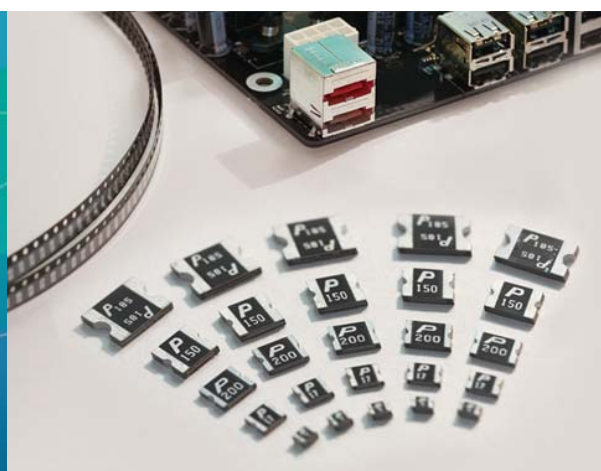

SMD0603 HF Series Surface Mount PTC Devices

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

SMD0603 HF Series Surface Mount PTC Devices

Description

The 0603 series provides miniature surface mount resettable overcurrent protection with holding current from 100mA to 500mA. This world's smallest PTC is suitable for ultra portable applications where space is at a premium and the device current is low.

Features

- RoHS compliant and lead-free
- Halogen-free
- Compact design saves board space
- Low profile
- Fast response to fault current
- Compatible with high temperature solders



Applications

- Mobile phones and PDAs
- Portable MP3 and media player
- Mobile Internet Device (MID)
- USB peripherals
- IC VCC protection

Agency Approval and Environmental Compliance

Agency	File Number	Regulation	Standard
	E201431		2002/95/EC
	R50099121		IEC 61249-2-21:2003

Electrical Characteristics

Part Number	I _{hold} (A)	I _{trip} (A)	V _{max} (Vdc)	I _{max} (A)	P _{d typ} (W)	Maximum Time To Trip		Resistance		Agency Approval	
						Current (A)	Time (Sec.)	R _{min} (Ω)	R _{1max} (Ω)		
SMD0603P004TF	0.04	0.12	24	20	0.5	0.20	1.00	4.000	40.000	✓	✓
SMD0603P010TF	0.10	0.30	15	40	0.5	0.50	1.00	0.900	6.000	✓	✓
SMD0603P020TF	0.20	0.50	9	40	0.5	1.00	0.60	0.550	3.500	✓	✓
SMD0603P025TF	0.25	0.55	9	40	0.5	8.00	0.08	0.500	3.000	✓	✓
SMD0603P035TF	0.35	0.75	6	40	0.5	8.00	0.10	0.200	1.000	✓	✓
SMD0603P050TF	0.50	1.00	6	40	0.5	8.00	0.10	0.100	0.680	✓	✓

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

SMD0603 HF Series Surface Mount PTC Devices

Note on Electrical Characteristics

■ Vocabulary

I_{hold} = Hold current: maximum current device will pass without tripping in 23°C still air.

I_{trip} = Trip current: minimum current at which the device will trip in 23 °C still air.

V_{max} = Maximum voltage device can withstand without damage at rated current (I_{max})

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max})

$P_{d\ typ}$ = Typical power dissipated from device when in the tripped state at 23 °C still air.

R_{min} = Minimum resistance of device in initial (un-soldered) state.

R_{1max} = Maximum resistance of device at 23 °C measured one hour after tripping or reflow soldering of 260 °C for 20 sec.

- Value specified is determined by using the PWB with 0.020" * 1.5oz copper traces.
- Caution: Operation beyond the specified rating may result in damage and possible arcing and flame.
- Specifications are subject to change without notice.

Polymeric PTC Selecting Guide

■ Determine the following operating parameters for the circuits:

- Normal operating current (I_{hold})
- Maximum circuit voltage (V_{max})
- Maximum interrupt current (I_{max})
- Normal operating temperature surrounding device (min°C/max°C)

■ Select the device form factor and dimension suitable for the application:


- Surface Mount Device (SMD)
- Radial Leaded Device (RLD)
- Axial Leaded Device (ALD)
- DISC Device
- Other Customized Form Factors

- Compare the maximum rating for V_{max} and I_{max} of the PPTC device with the circuit in application and make sure the circuit's requirement does not exceed the device rating.
- Check that PPTC device's trip time (time-to-trip) will protect the circuit.
- Verify that the circuit operating temperature is within the PPTC device's normal operating temperature range.
- Verify the performance and suitability of the chosen PPTC device in the application.

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

SMD0603 HF Series Surface Mount PTC Devices

Thermal Derating Curve

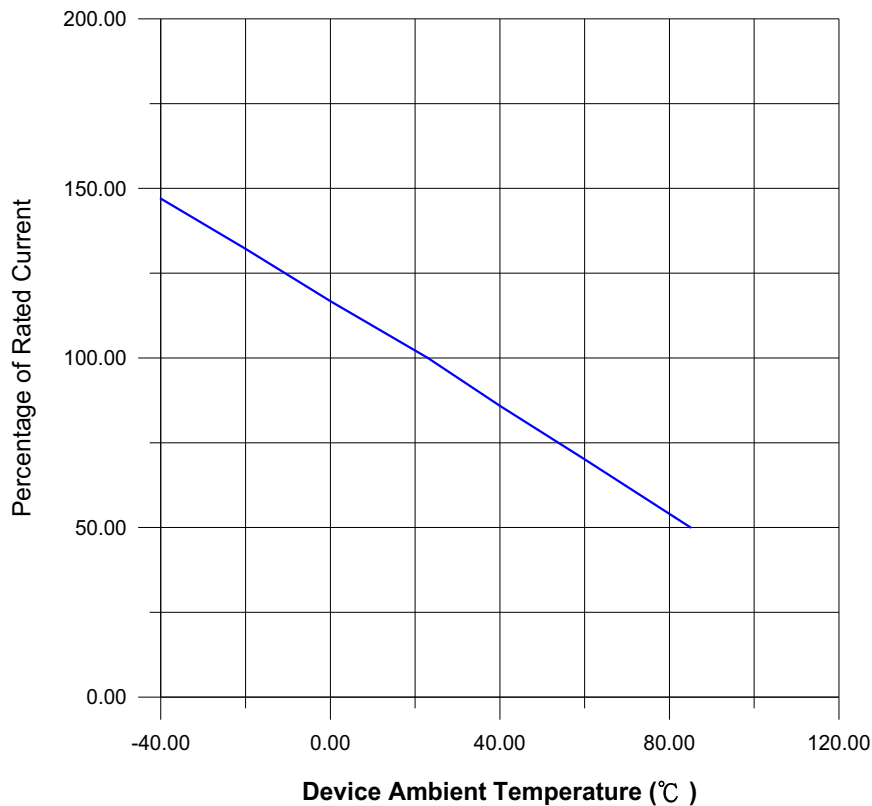

Thermal Derating Chart


Recommended Hold Current (A) at Ambient Temperature (°C)

Part Number	Ambient Operation Temperature								
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C
SMD0603P004TF	0.052	0.048	0.044	0.040	0.032	0.028	0.024	0.020	0.012
SMD0603P010TF	0.13	0.12	0.11	0.10	0.08	0.07	0.06	0.05	0.03
SMD0603P020TF	0.27	0.25	0.23	0.20	0.17	0.14	0.12	0.10	0.07
SMD0603P025TF	0.32	0.29	0.27	0.25	0.21	0.18	0.16	0.14	0.10
SMD0603P035TF	0.47	0.41	0.38	0.35	0.29	0.26	0.24	0.20	0.14
SMD0603P050TF	0.67	0.59	0.54	0.50	0.41	0.37	0.34	0.29	0.20

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

SMD0603 HF Series Surface Mount PTC Devices

Average Time-Current Curve

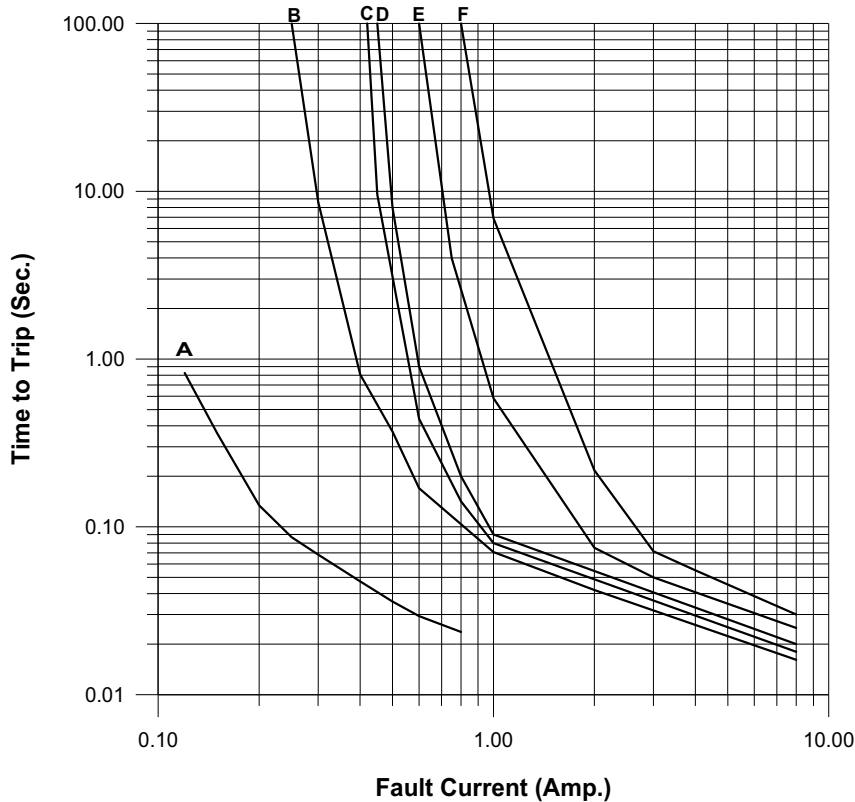


- A — SMD0603P004TF
- B — SMD0603P010TF
- C — SMD0603P020TF
- D — SMD0603P025TF
- E — SMD0603P035TF
- F — SMD0603P050TF

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

SMD0603 HF Series Surface Mount PTC Devices

Soldering Parameters

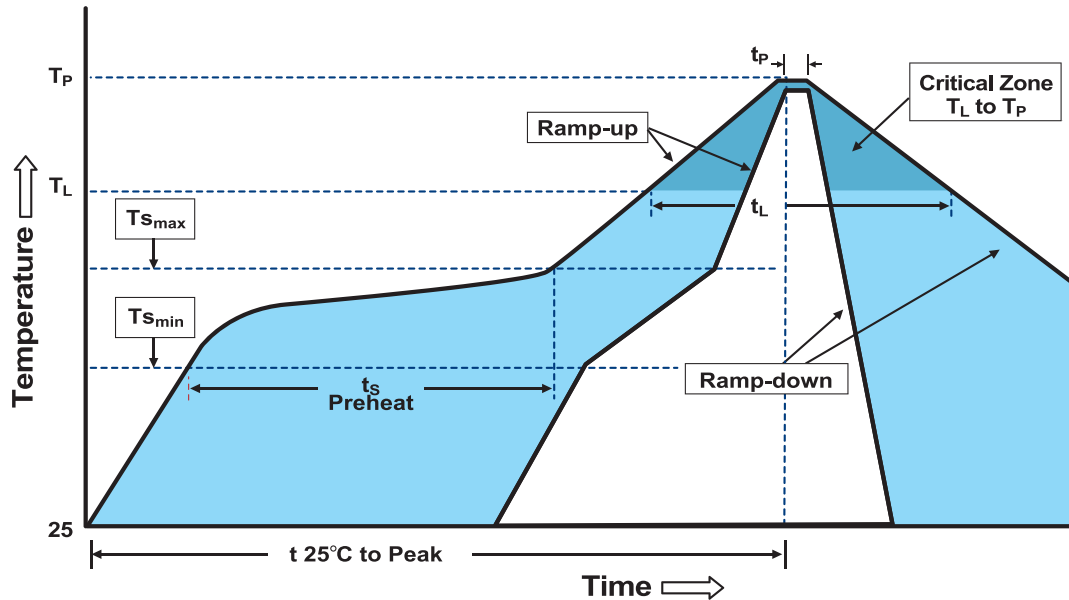

Profile Feature	Pb-Free Assembly
Average Ramp-Up Rate ($T_{s_{max}}$ to T_P)	3°C/second max.
Preheat	
-Temperature Min ($T_{s_{min}}$)	150°C
-Temperature Max ($T_{s_{max}}$)	200°C
-Time ($T_{s_{min}}$ to $T_{s_{max}}$)	60-180 seconds
Time maintained above:	
-Temperature (T_L)	217°C
-Time (t_L)	60-150 seconds
Peak Temperature (T_P)	260°C
Time within 5°C of actual Peak Temperature (t_P)	20-40 seconds
Ramp-Down Rate	6 °C /second max.
Time 25°C to Peak Temperature	8 minutes max.
Storage Condition	0°C ~35°C, ≤ 70%RH

- Recommended reflow methods: IR, vapor phase oven, hot air oven, N₂ environment for lead-free
- Recommended maximum paste thickness is 0.25mm (0.010 inch)
- Devices can be cleaned using standard industry methods and solvents.


Note 1: All temperature refer to topside of the package, measured on the package body surface.

Note 2: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

SMD0603 HF Series Surface Mount PTC Devices

Physical Dimensions (mm.)

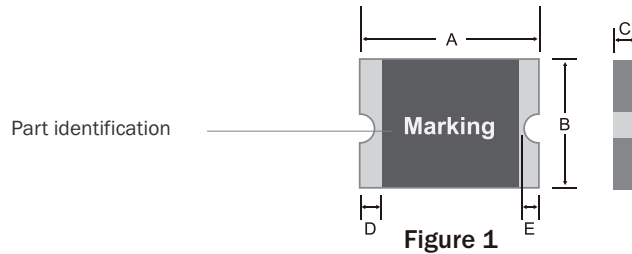

Part Number	A		B		C		D		E	
	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
SMD0603P004TF	1.40	1.80	0.60	1.00	0.40	0.75	0.15	0.50	–	0.40
SMD0603P010TF	1.40	1.80	0.60	1.00	0.40	0.75	0.15	0.50	–	0.40
SMD0603P020TF	1.40	1.80	0.60	1.00	0.40	0.75	0.15	0.50	–	0.40
SMD0603P025TF	1.40	1.80	0.60	1.00	0.40	0.75	0.15	0.50	–	0.40
SMD0603P035TF	1.40	1.80	0.60	1.00	0.75	1.55	0.15	0.50	–	0.40
SMD0603P050TF	1.40	1.80	0.60	1.00	0.75	1.55	0.15	0.50	–	0.40

Environmental Specifications


Operating/Storage Temperature	-40°C to +85 °C
Maximum Device Surface Temperature in Tripped State	125°C
Passive Aging	+85°C , 1000 hours ±5% typical resistance change
Humidity Aging	+85°C , 85%R.H. 1000 hours ±5% typical resistance change
Thermal Shock	MIL-STD-202 Method 107G +85°C /-40°C 20 times -30% typical resistance change
Solvent Resistance	MIL-STD-202, Method 215 No change
Vibration	MIL-STD-883C, Method 2007.1, Condition A No change
Moisture Level Sensitivity	Level 1, J-STD-020C

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

SMD0603 HF Series Surface Mount PTC Devices

Packaging Quantity and Marking

Recommended Pad Layout (mm.)

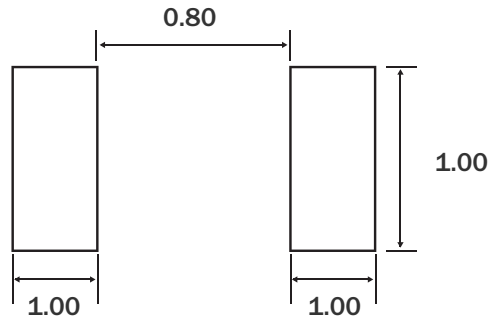

Part Number	Marking	Quantity
SMD0603P004TF	—	4000
SMD0603P010TF	C	4000
SMD0603P020TF	H	4000
SMD0603P025TF	I	4000
SMD0603P035TF	F	4000
SMD0603P050TF	J	4000

◎ 8 mm tape on 7 inch reel per EIA-481-1 (equivalent to IEC286, part 3)

Physical Specifications

Terminal Material	Solder-Plated Copper (Solder Material: Matte Tin (Sn))
Lead Solderability	Meets EIA Specification RS186-9E, ANSI/J-STD-002 Category 3.

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com



SMD0603 HF Series Surface Mount PTC Devices

Tape Specifications: EIA-481-1 (mm.)

	P004TF P010TF P020TF P025TF	P035TF P050TF
W	8.00 ± 0.30	8.00 ± 0.30
F	3.50 ± 0.05	3.50 ± 0.05
E ₁	1.75 ± 0.10	1.75 ± 0.10
D ₀	1.55 ± 0.05	1.55 ± 0.05
D ₁	0.50 ± 0.10	0.50 ± 0.10
P ₀	4.00 ± 0.10	4.00 ± 0.10
P ₁	4.00 ± 0.10	4.00 ± 0.10
P ₂	2.00 ± 0.05	2.00 ± 0.05
A ₀	1.10 ± 0.10	1.10 ± 0.10
B ₀	1.92 ± 0.10	1.92 ± 0.10
T	0.20 ± 0.10	0.20 ± 0.10
K ₀	0.72 ± 0.10	0.96 ± 0.10
Leader min.	390	390
Trailer min.	160	160

Reel Dimensions: EIA-481-1 (mm.)

C	Ø178 ± 1.0
D	Ø60.2 ± 0.5
H	11.0 ± 0.5
W	9.0 ± 1.5

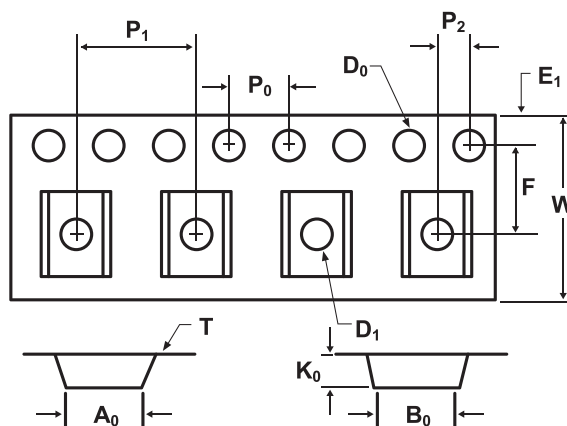


购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com

SMD0603 HF Series Surface Mount PTC Devices

Part Number System

SMD 0603 P **TF T** /

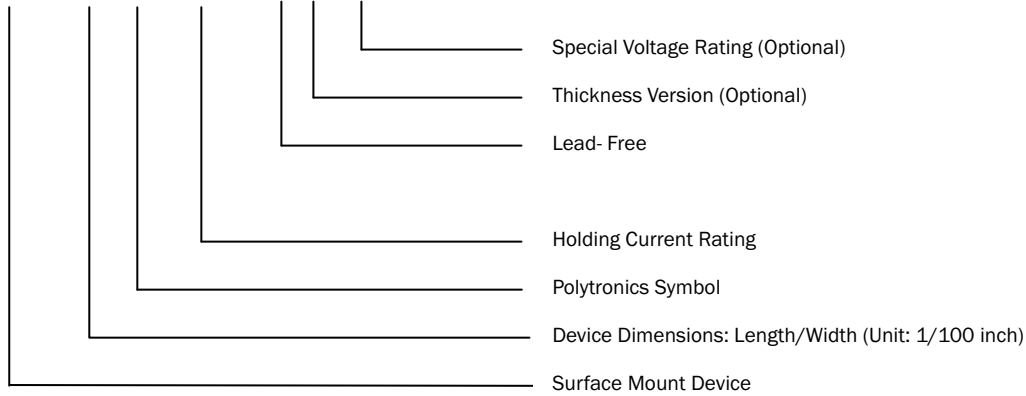

Cross Reference

Polytronics / EVERFUSE [®]	Cross Reference	
	Tyco / PolySwitch [®]	Bourns / Multifuse [®]
SMD0603P004TF	-	-
SMD0603P010TF	FemtoSMD010F	-
SMD0603P020TF	FemtoSMD020F	MF-FSMF020X
SMD0603P025TF	-	-
SMD0603P035TF	FemtoSMD035F	MF-FSMF035X
SMD0603P050TF	-	MF-FSMF050X

“EVERFUSE” is a registered trademark of Polytronics Technology Corp.

“Multifuse” is a registered trademark of Bourns , Inc.

“PolySwitch” is a registered trademark of Tyco Electronics.

购买原装正品请认准-德方电子
免费服务热线: 400-655-8700
深圳总部电话: 0755-28187877
网址: www.denovocn.com