

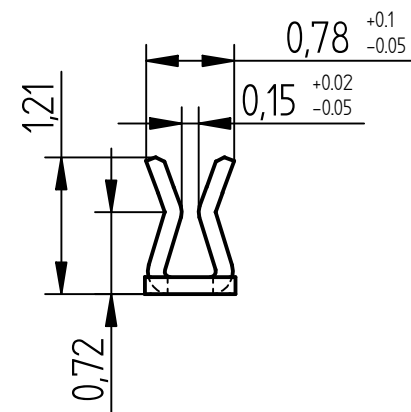
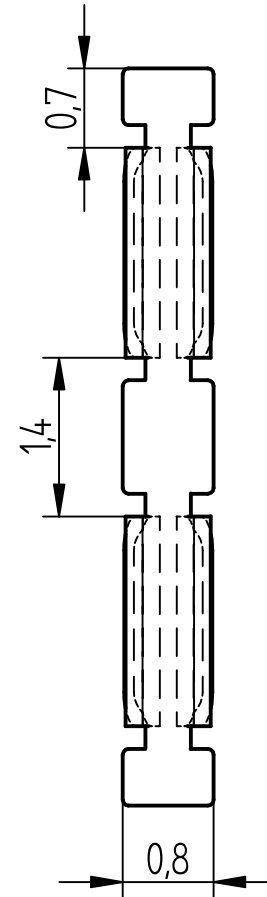
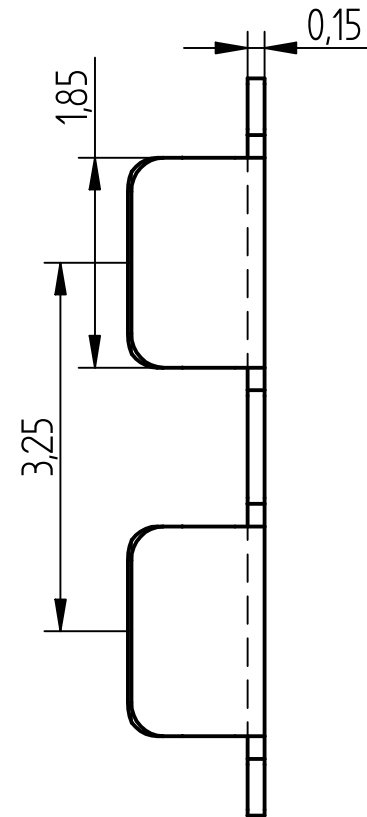


REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
A	신규 제정	2009.10.05	P.K.KO
B	인입부 공차 수정 +0.1 -0.05	2012.02.15	P.K.KO
C	SHIELD CASE THICKNESS 0.2±0.02 => 0.2 +0.02 -0	2012.03.30	P.K.KOH

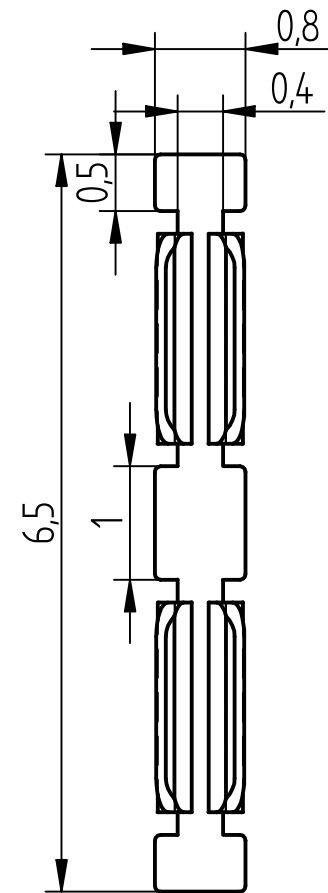

SCALE : 15/1

TAPING 사양도 (SCALE 3/1)

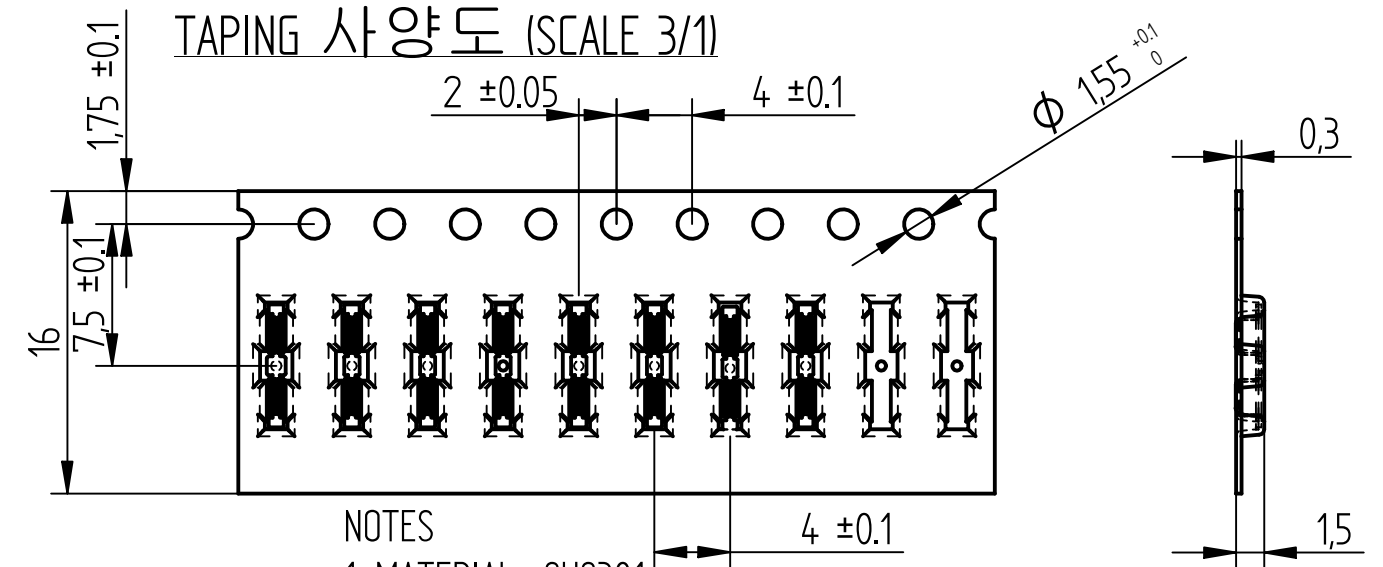



NOTES

1. MATERIAL : SUS301
2. MATERIAL THICKNESS : 0.15t
3. FINISHED : Sn(100%) PLATING ON BOTH SIDE
(Ni 0.5 μ m Sn1.27 μ m)
4. PACKING MATERIALS.
- REEL : HIPS 0.3t
- COVER TAPE : PS
- Q'TY/REEL : 10,000ea
5. AVAILABLE SHIELD CASE THICKNESS : 0.2 +0.02 -0
6. CONTACT RESISTANCE 300mm Ω MAX
7. INTENTION FORCE/RETENTION FORCE SPEC

	INTENTION FORCE	RETENTION FORCE
SPEC	MAX 1.0Kg	MIN 0.3Kg

8. STENCIL THICKNESS : 0.12T


9. Maintain 90°±3 while engage & disengage shield can & shield clip to prevent deformation & to maintain retention force of shield clip

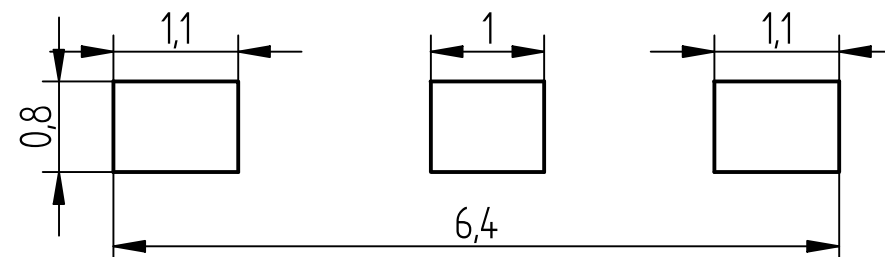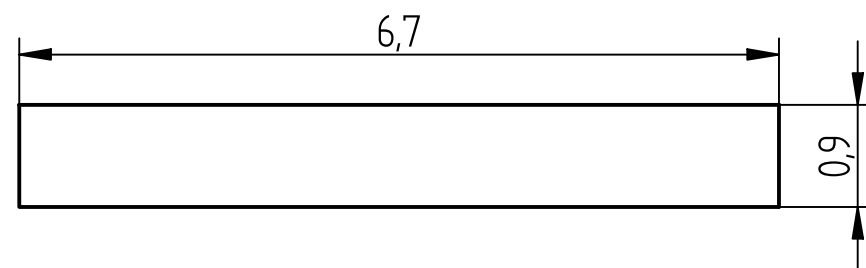

RECOMMENDED STENCIL LAY-OUT 0.1T

RECOMMENDED PCB LAYOUT
 购买原厂正品IC产品，请认准
 免费服务热线: 400-655-8700
 深圳总部电话: 0755-28187877
 网址: www.denovocn.com

UNLESS OTHERWISE SPECIFIED
 DIMENSIONS ARE IN MILLIMETERS
 TOLERANCES ARE
 ANGLES $\pm 0.3^\circ$
 0 ~ 1 ± 0.05
 1 ~ 5 ± 0.1
 5 ~ 10 ± 0.15



TITLE SHIELD CLIP		
SIZE A3	DWG NO ICSRC6508SFR	REV C
FILE NAME: ICSRC6508SFR.dft		
SCALE:	WEIGHT:	SHEET 1 OF 1